



1/10

FIG. 1
(PRIOR ART)

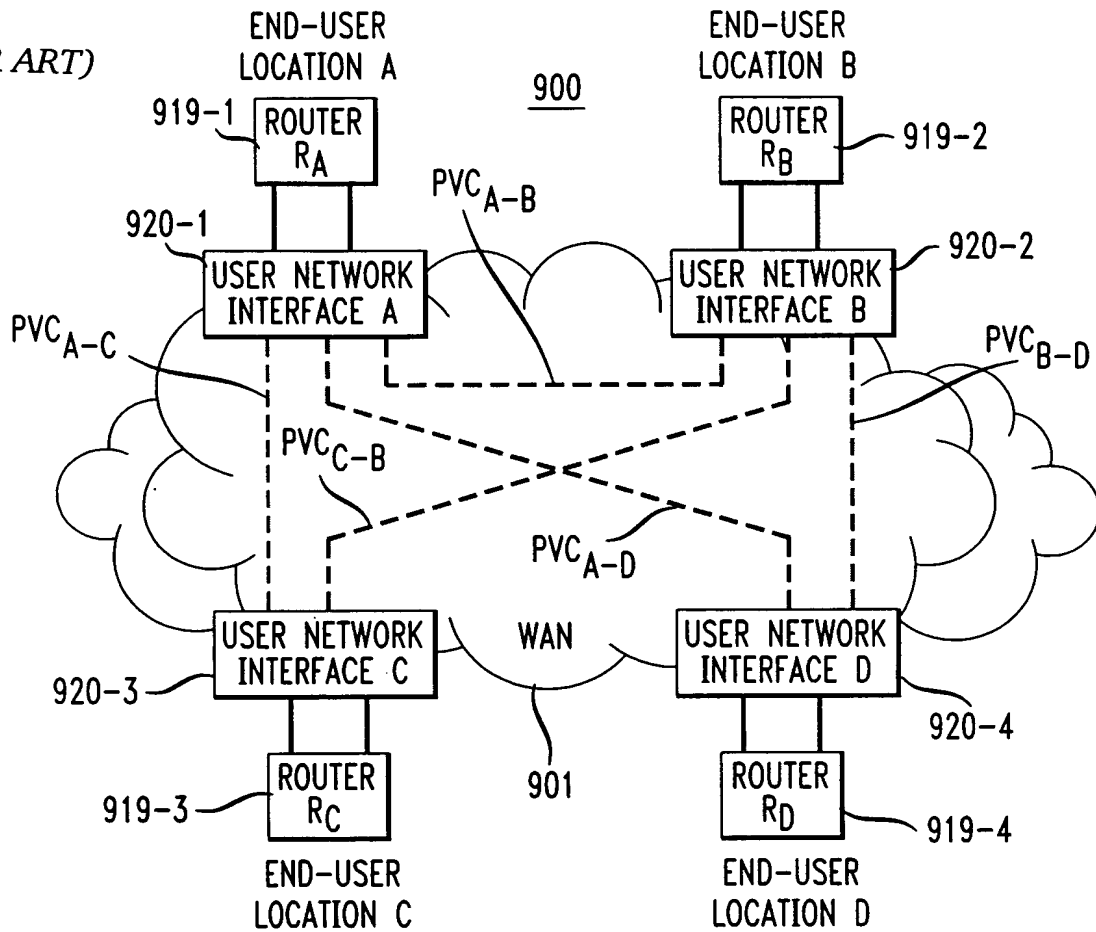

002140" 66ET560

FIG. 2

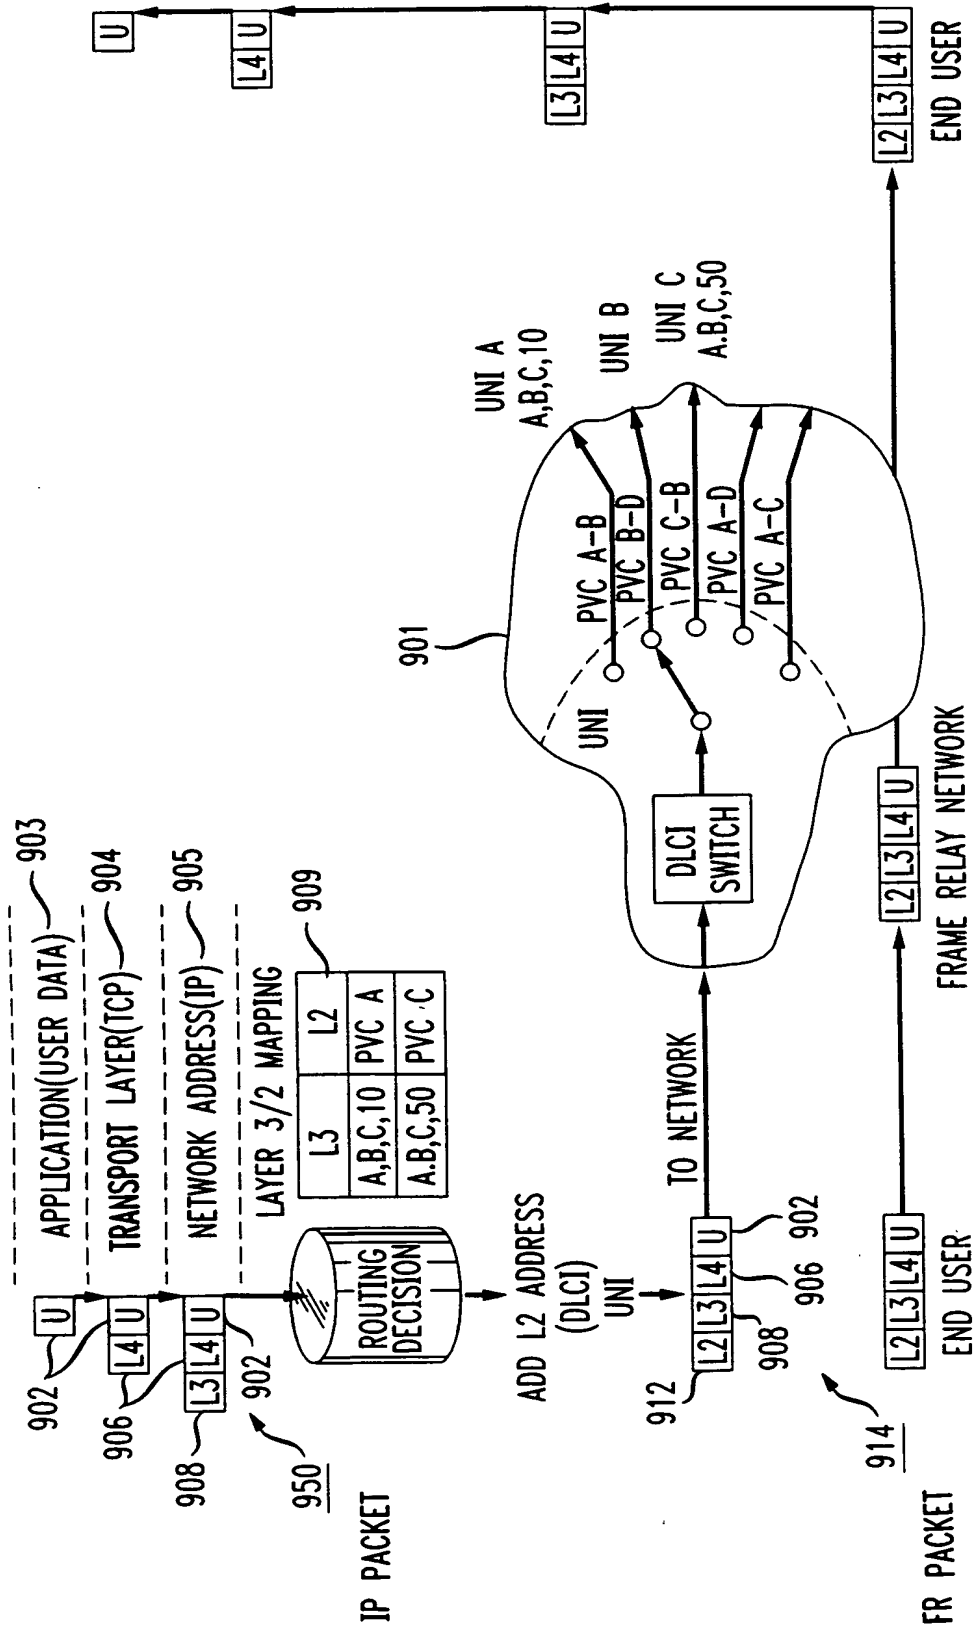

(PRIOR ART)

FIG. 3 3/10


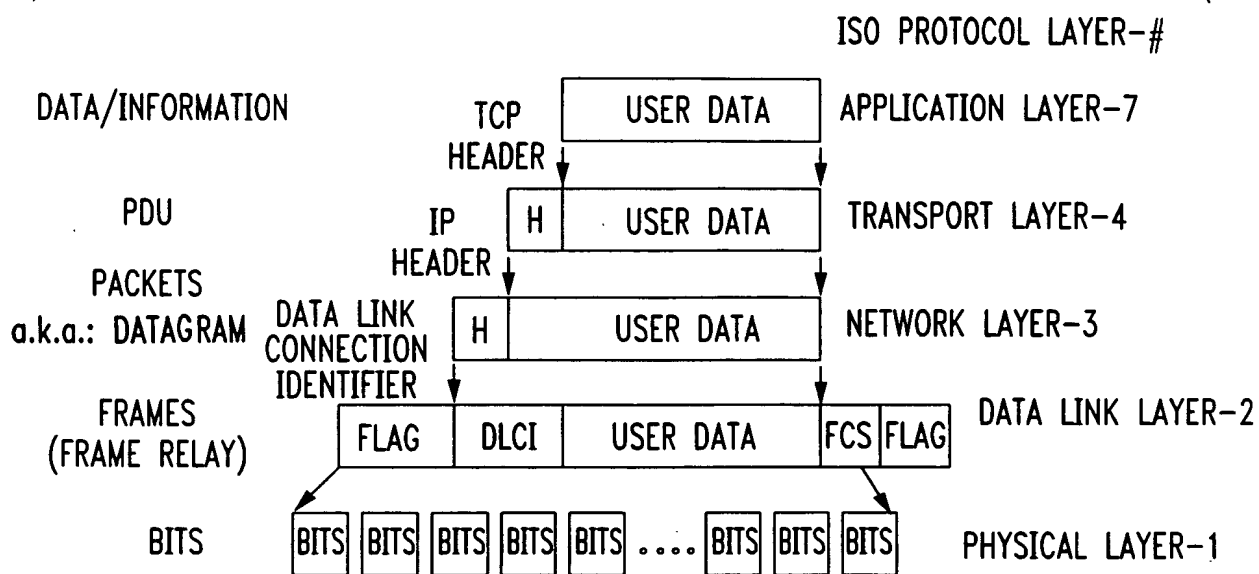


FIG. 4


(PRIOR ART)

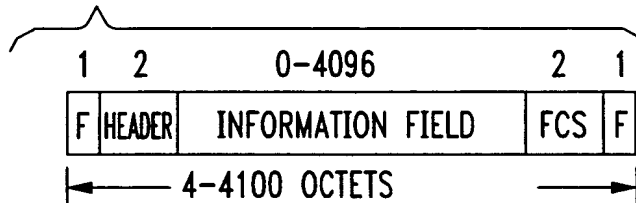

F = FRAME DELIMITER (FLAG)
(01111110 BINARY VALUE)
HEADER = FR HEADER FIELD
INFORMATION FIELD = USER'S PAYLOAD
FCS = FRAME CHECK SEQUENCE

FIG. 5

(PRIOR ART)

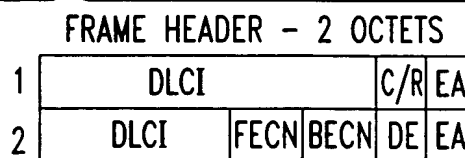

DLCI = DATA LINK CONNECTION IDENTIFIER (10 BITS)
C/R = COMMAND / RESPONSE (1BIT)
EA = EXTENDED ADDRESS (2 BITS)
FECN = FORWARD EXPLICIT CONGESTION NOTIFICATION (1 BIT)
BECN = BACKWARD EXPLICIT CONGESTION NOTIFICATION (1 BIT)
DE = DISCARD ELIGIBILITY (1 BIT)



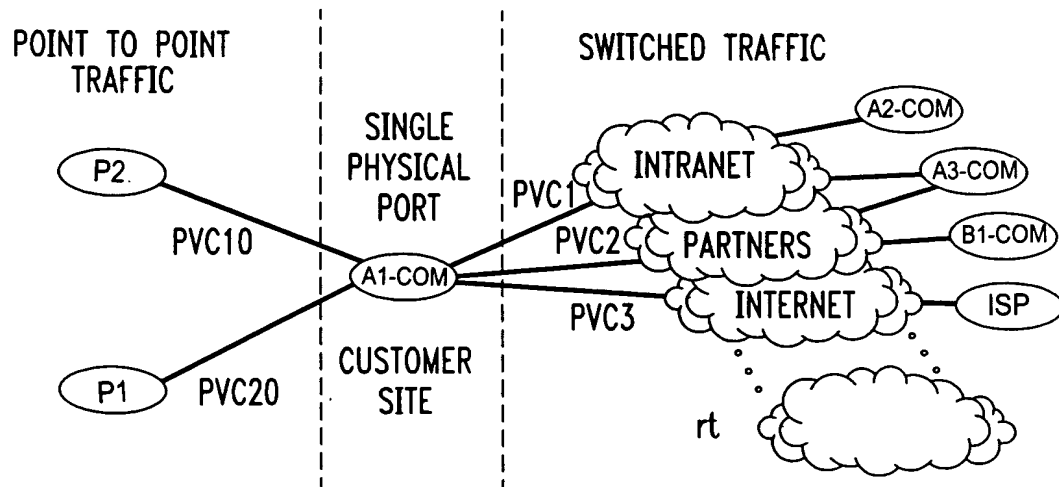


FIG. 11

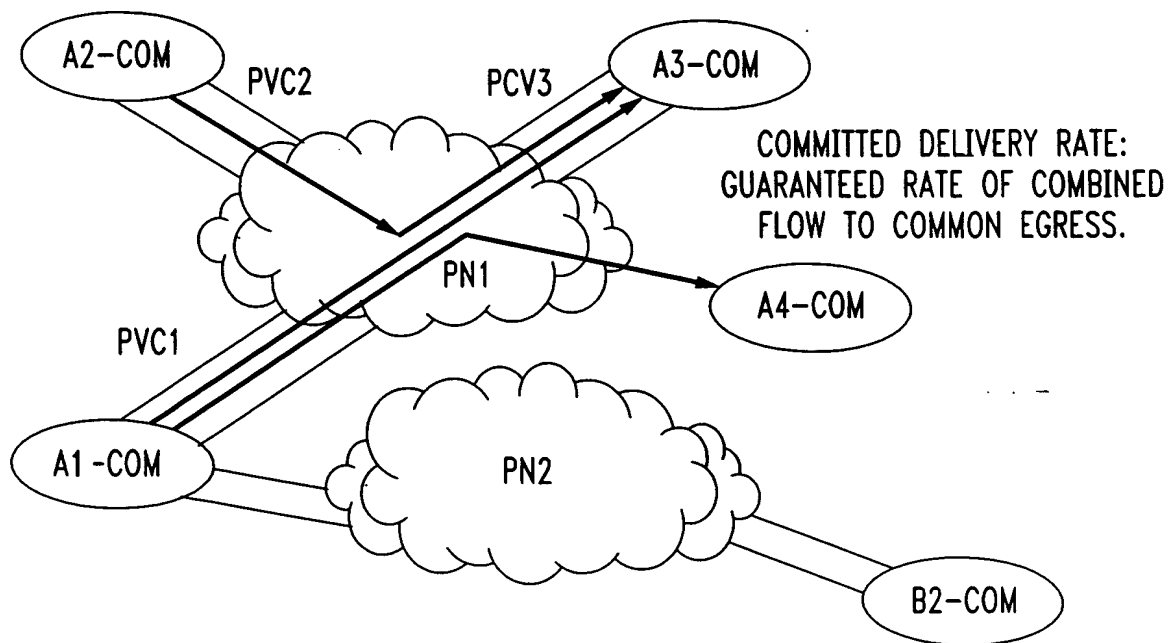

5/10

FIG. 7

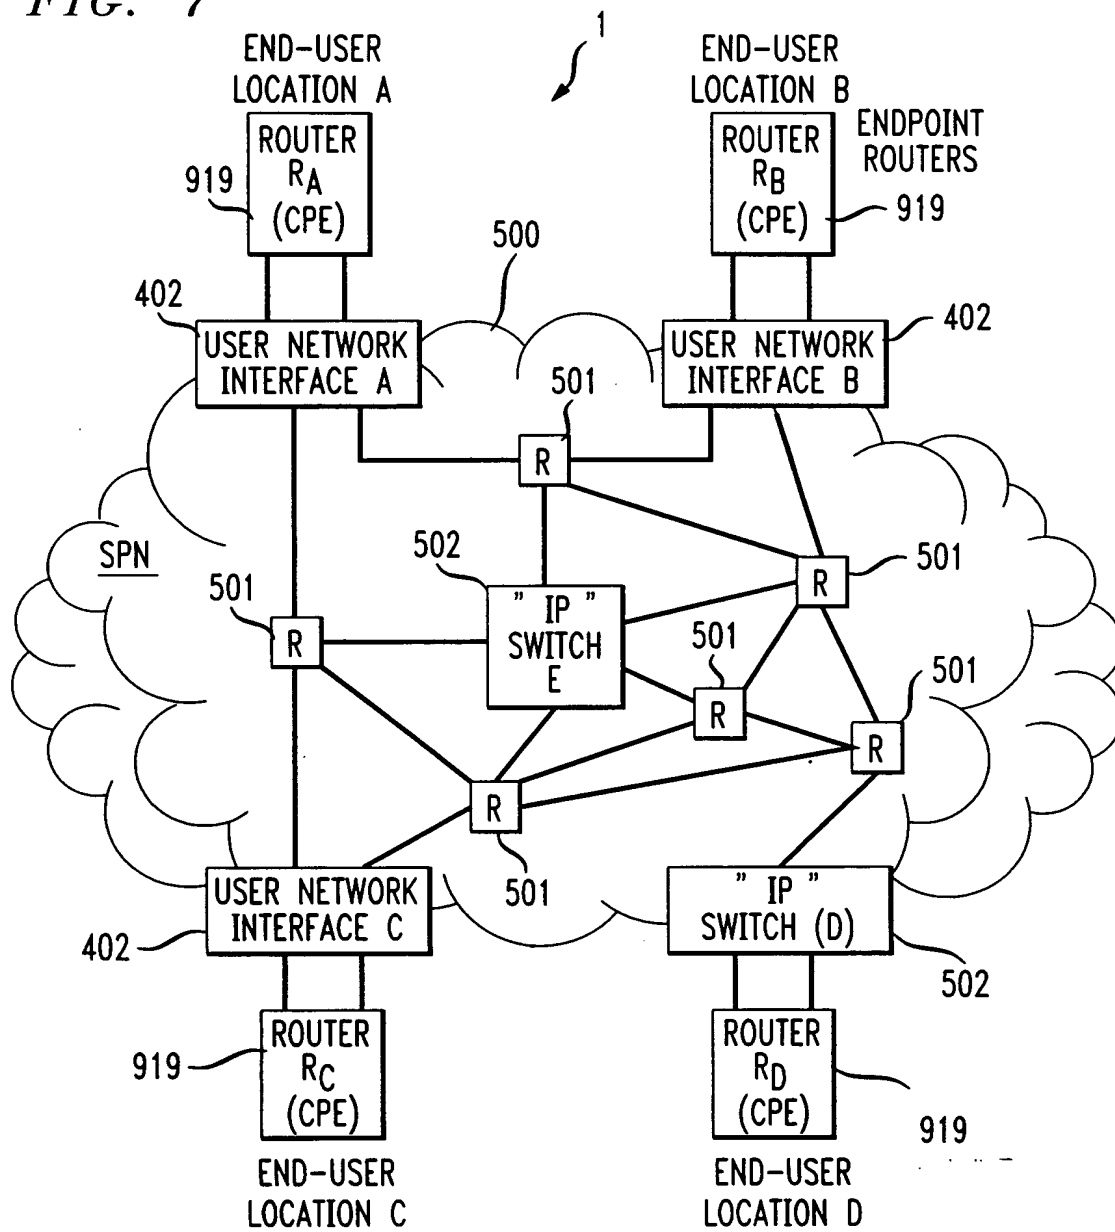

6/10

FIG. 8A

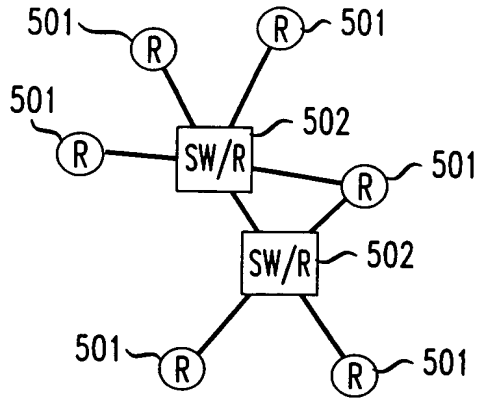


FIG. 8B


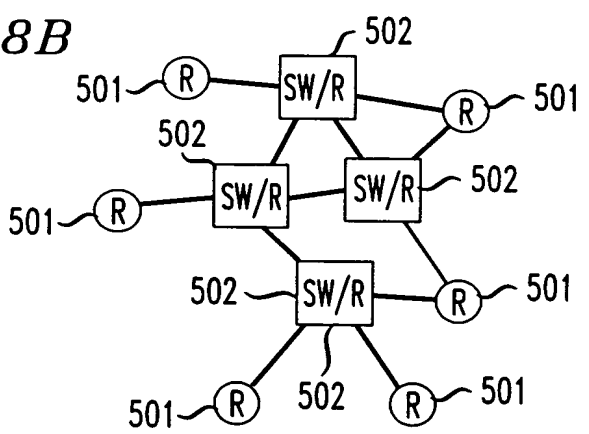



FIG. 10

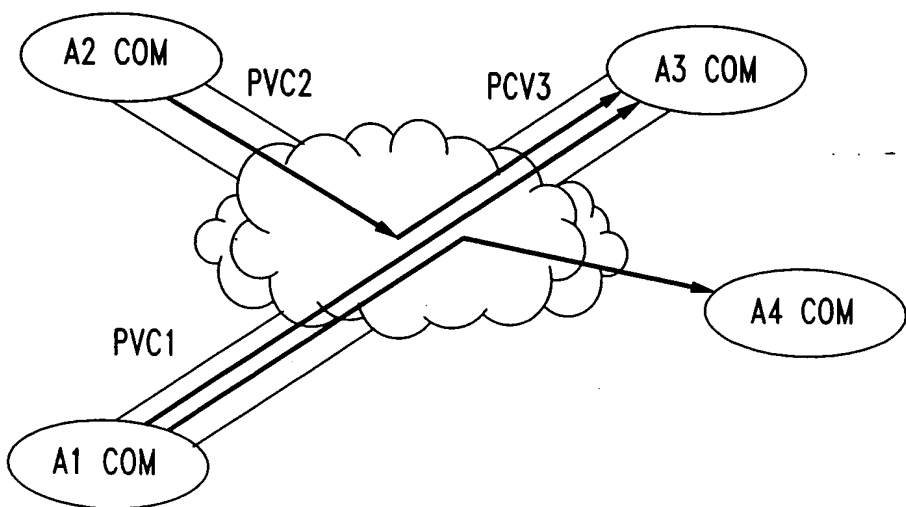

005139-0400


7/10

FIG. 9

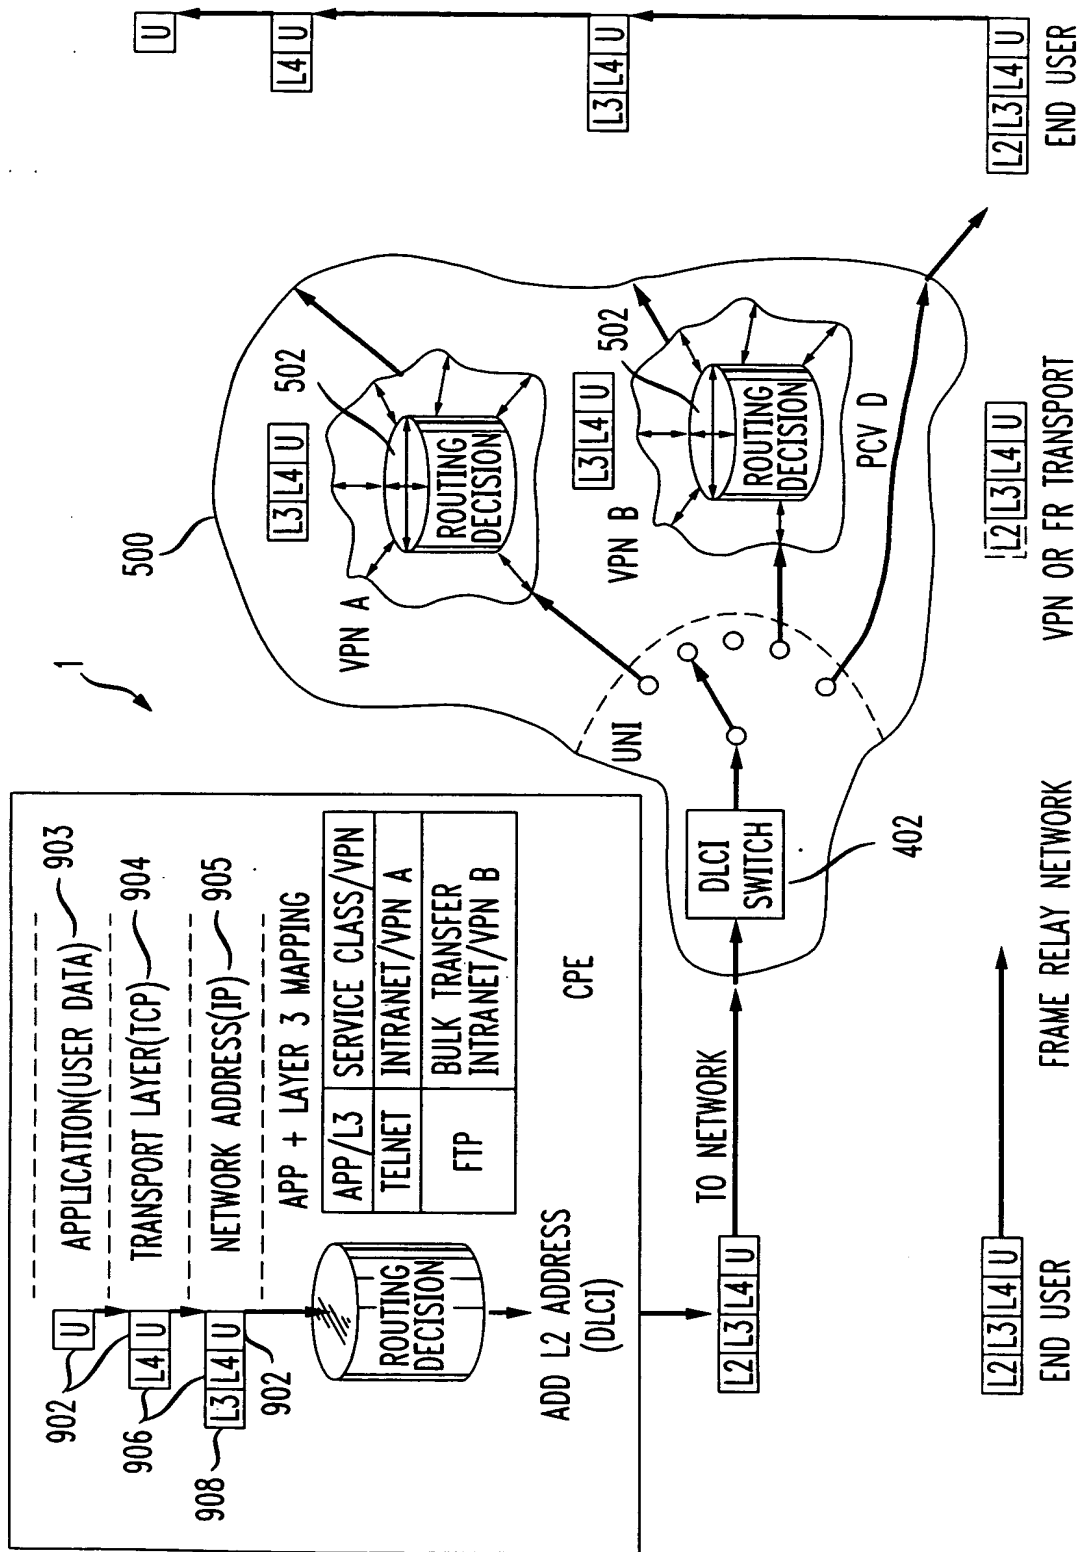


8/10

FIG. 12

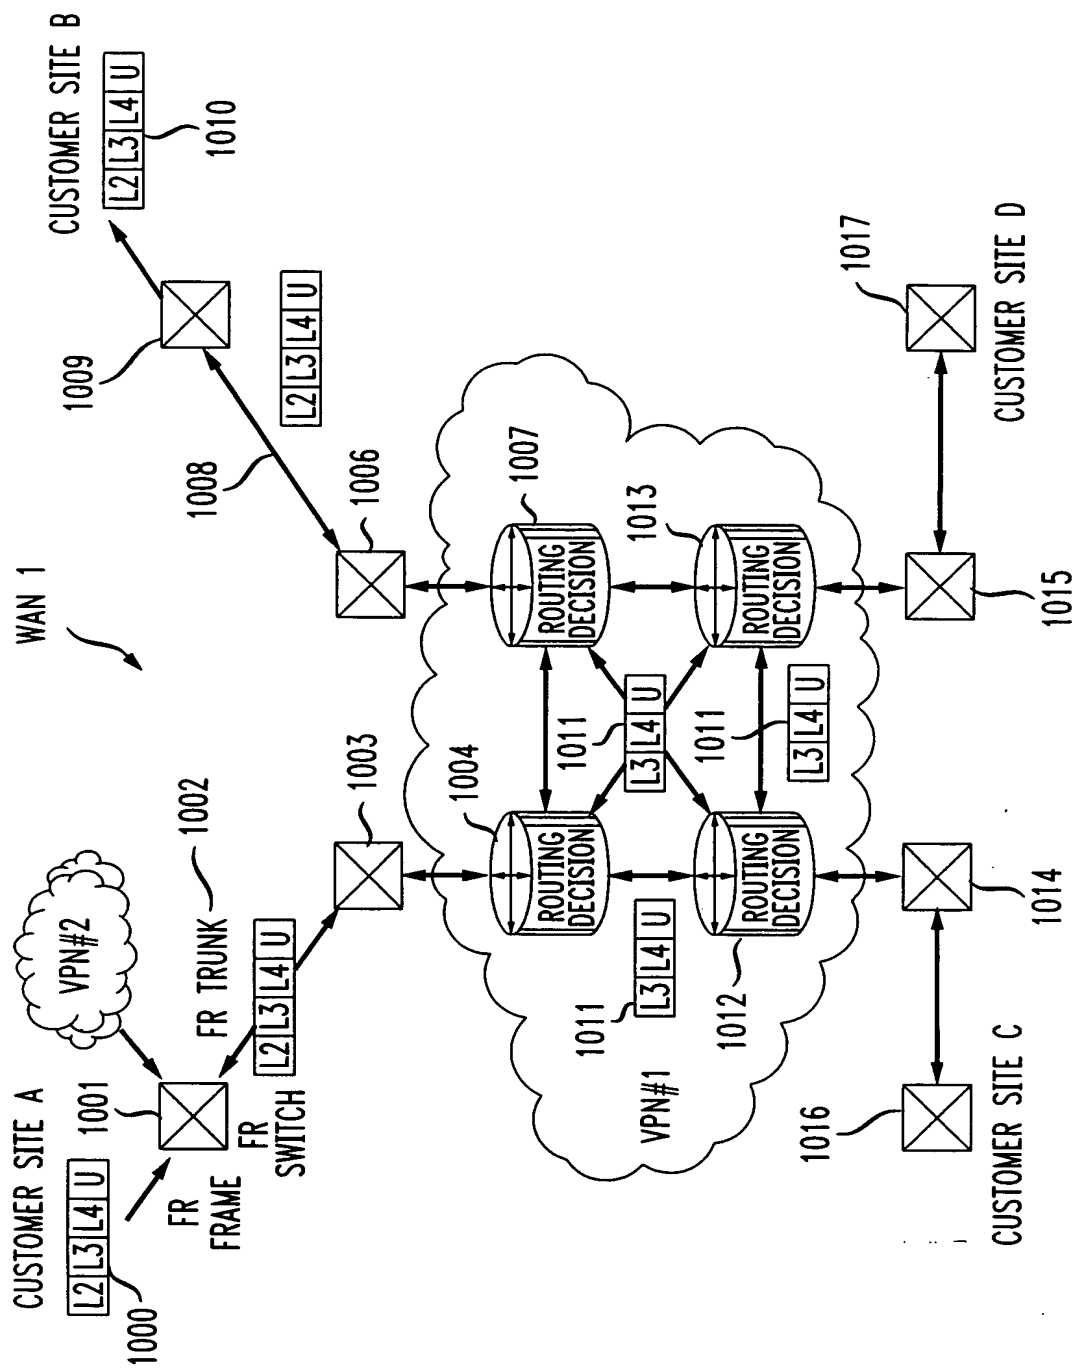


9/10

FIG. 13

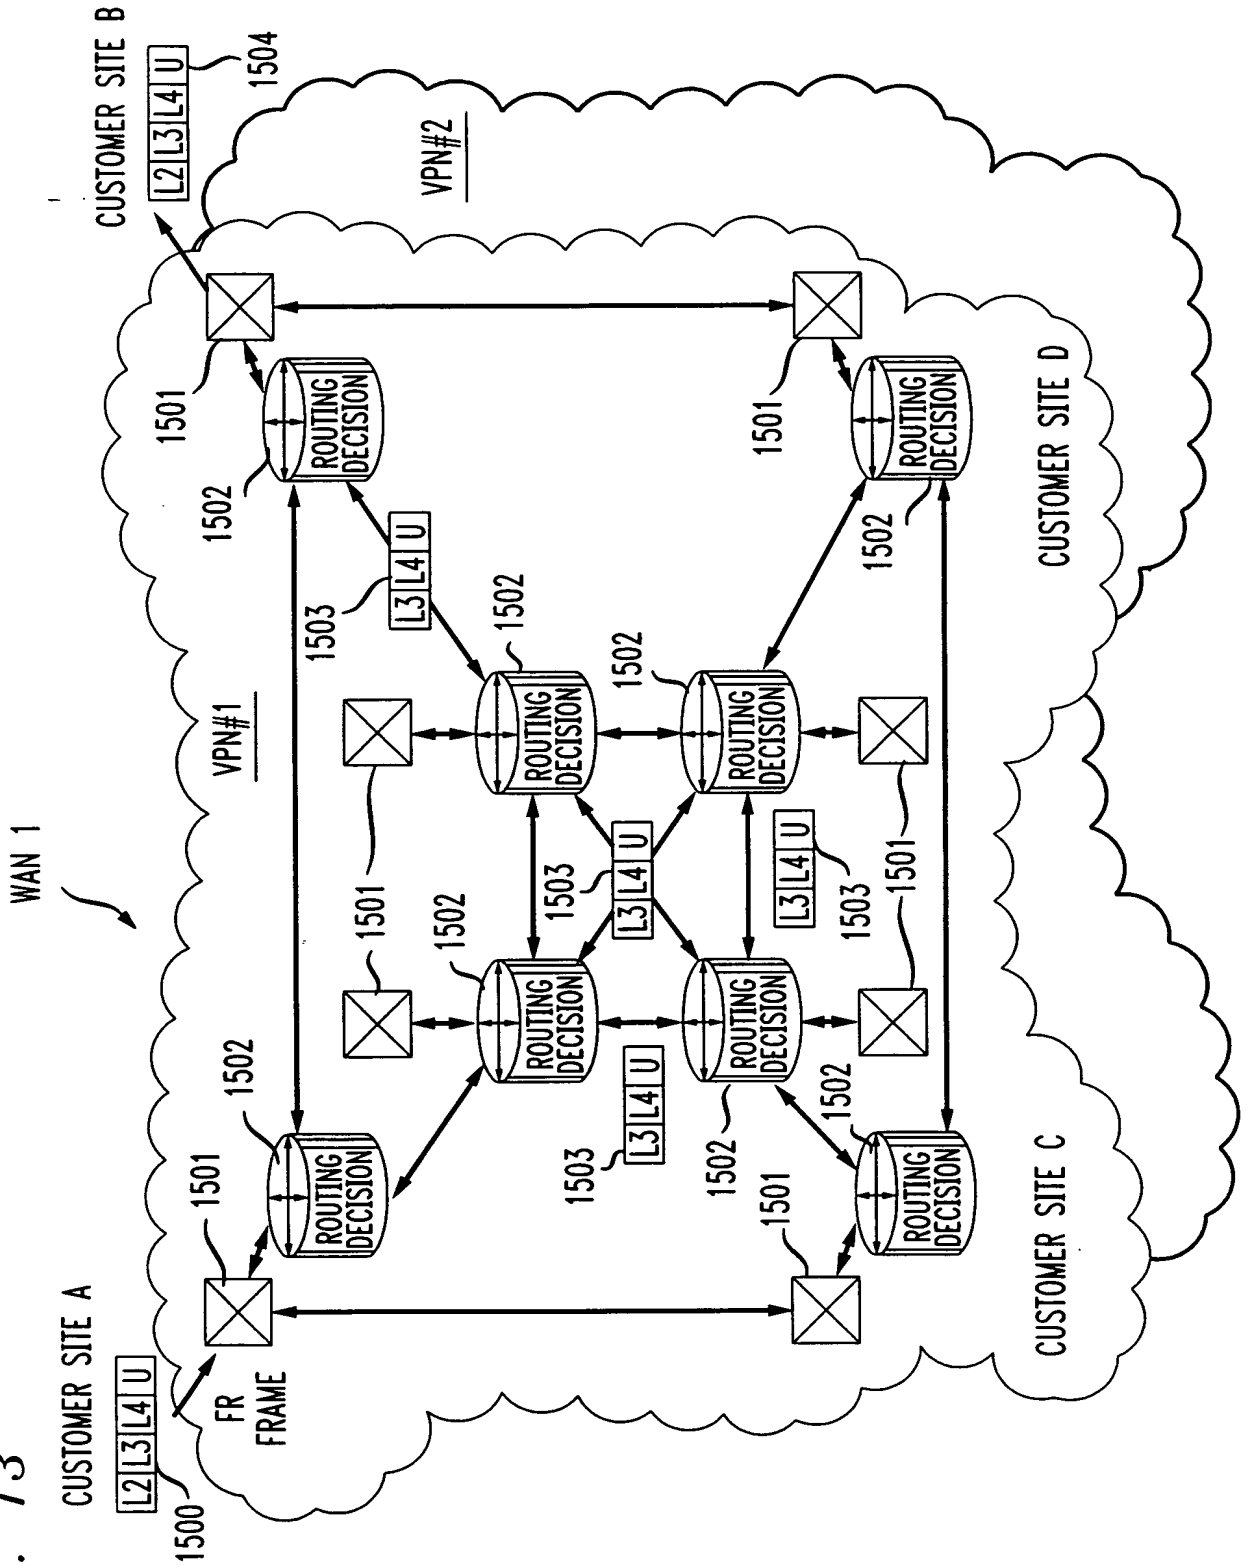

10/10

FIG. 14

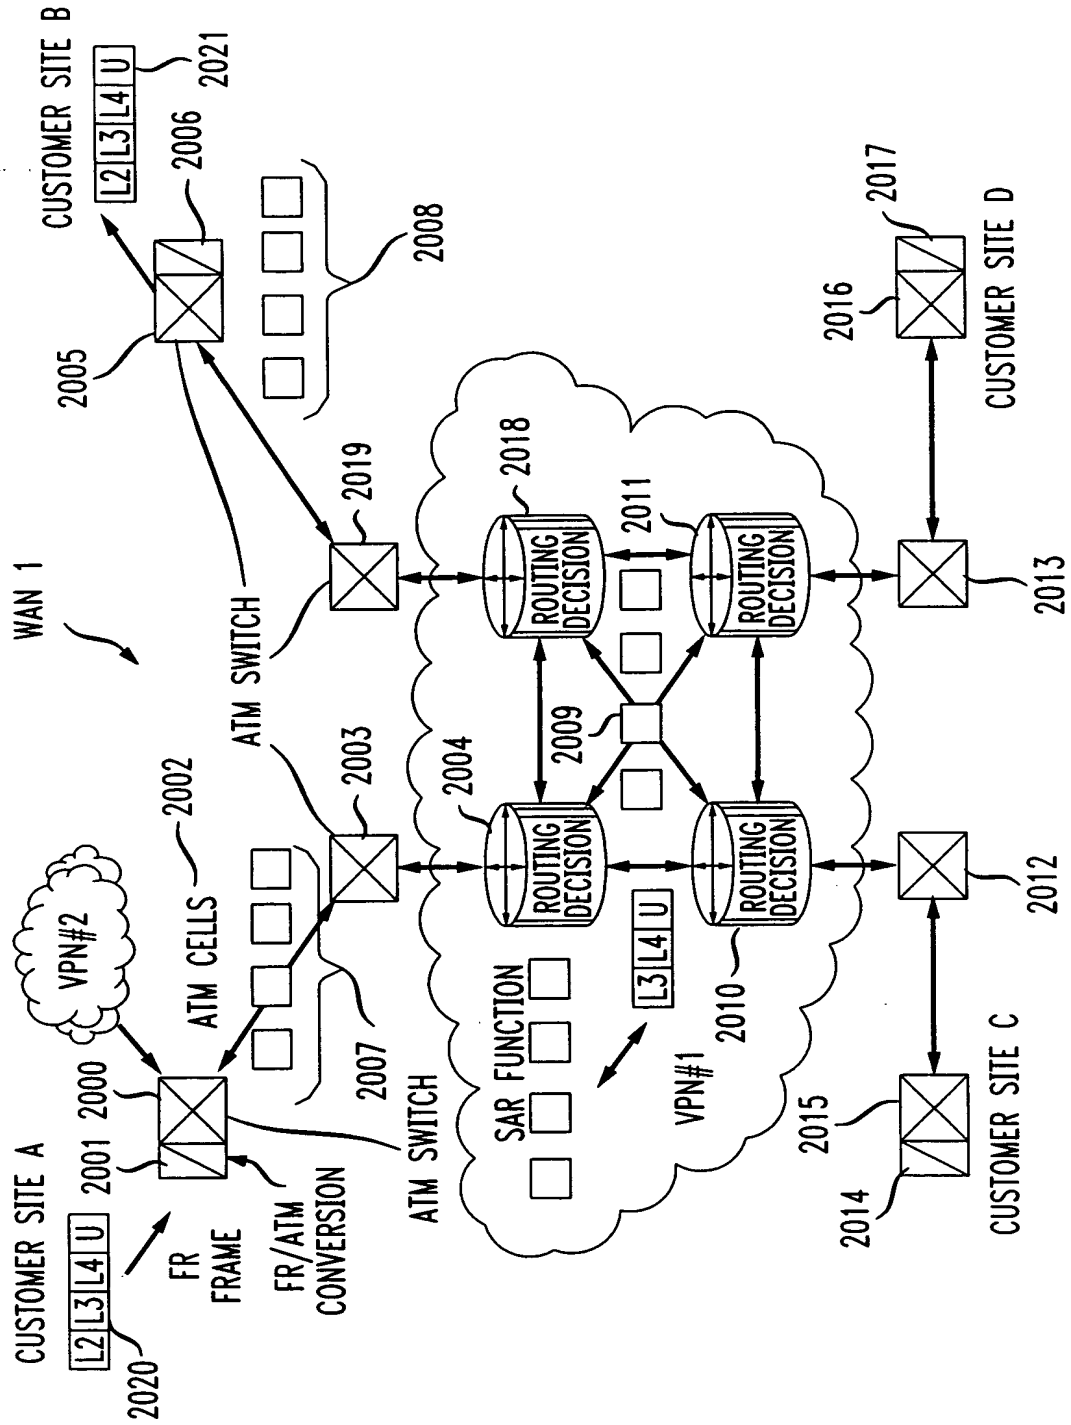

004740" 66ET5560

APPROVED BY
DATE
MANAGER